

08/11/00



J0715 U.S. PTO

Please type a plus sign (+) inside this box --

Approved for use through 09/30/2000 OMB 0651-0032
Patent and Trademark Office U.S. DEPARTMENT OF COMMERCE

PTO/SB/05 (1/98)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

J0662 U.S. PTO
09/637064
08/11/00**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 0819-407

First Inventor or Application Identifier: RYUICHI KIDO ET AL.

Title: METHOD OF EVALUATING THE POWER TRANSMISSION
ABILITY OF FRICTIONAL POWER TRANSMISSION BELT AND
METHOD OF AIDING THE DESIGNING FOR BELT DRIVE SYSTEM

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification *Total Pages [23]*
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) *Total Sheets [11]*
4. ☒ Oath or Declaration *Total Pages [3]*
- a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a
copy of the oath or declaration is supplied under Box 4b,
is considered to be part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement ☐ Copies of IDS
(IDS)/PTO-1449 Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ *Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired
(PTO/SB/09-12)
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other: CLAIM OF PRIORITY

*A new statement is required to be entitled to pay small entity fees,
except where one has been filed in a prior application and is being
relied upon.

17. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment:
- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____
- Prior application information: Examiner: _____ Group/Art Unit: _____

18. CORRESPONDENCE ADDRESS☒ Customer Number or Bar Code Label

Customer No 22204

or ☐ Correspondence address below

(Insert Customer No or Attach bar code label here)

Name THOMAS W COLE, ESQUIRE
Firm: NIXON PEABODY LLP
Address 8180 Greensboro Drive, Suite 800
City: McLean State: VA
Country U.S.A. Telephone (703) 790-9110Zip Code 22102
FAX (703) 883-0370

Name (Print/Type) THOMAS W. COLE


Registration No. (Attorney/Agent): 28,290

Signature

Date: AUGUST 11, 2000

Burden Hour Statement This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

FEE TRANSMITTAL		Complete If Known					
<i>Patent fees are subject to annual revision on October 1. These are the fees effective October 1, 1997. Small Entity payments must be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB/09-12.</i>		Application Number		UNASSIGNED			
		Filing Date		UNASSIGNED			
		First Named Inventor		RYUICHI KODO ET AL.			
		Examiner Name		UNASSIGNED			
		Group Art Unit		UNASSIGNED			
TOTAL AMOUNT OF PAYMENT		(\$730.00)		Attorney Docket Number 0819-407			
METHOD OF PAYMENT (check one)		FEE CALCULATION (continued)					
1. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any over payments to Deposit Account No. 19-2380. Deposit Account Name SIXBEY, FRIEDMAN, LEEDOM & FERGUSON, PC. <input checked="" type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 <input type="checkbox"/> Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance. 2. <input checked="" type="checkbox"/> Payment Enclosed <input checked="" type="checkbox"/> Check <input type="checkbox"/> Money Order <input type="checkbox"/> Other		3. ADDITIONAL FEES					
		Large Entity		Small Entity			
		Fee Code	Fee (\$)	Fee Code	Fee (\$)	Fee Description	Fee Paid
		105	130	205	65	Surcharge-late filing fee or oath	
		127	50	227	25	Surcharge-late provisional filing fee or cover sheet	
		139	130	139	130	Non-English specification	
		147	2,520	147	2,520	For filing a request for reexamination	
		112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
		113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
		115	110	215	55	Ext for reply within first month	
		116	400	216	200	Ext for reply within second mth	
		117	950	217	475	Ext for reply within third mth	
		118	1,510	218	755	Ext for reply within fourth mth	
		128	2,060	228	1,030	Ext for reply within fifth month	
		119	310	219	155	Notice of Appeal	
		120	310	220	155	Filing brief in support of appeal	
		121	270	221	135	Request for Oral Hearing	
		138	1,510	138	1,510	Petition to institute public use proceeding	
		140	110	240	55	Petition to revive-unavoidable	
		141	1,320	241	660	Petition to revive-unintentional	
		142	1,320	242	660	Utility issue fee (or reissue)	
		143	450	243	225	Design issue fee	
		144	670	244	335	Plant issue fee	
		122	130	122	130	Petitions to the Commissioner	
		123	50	123	50	Petitions related to provisional applications	
		126	240	126	240	Submission of IDS	
		581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00
		146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))	
		149	790	249	395	For each additional invention to be examined (37 CFR 1.129(b))	
						Other _____	
						Other _____	
						*Reduced by Basic Filing Fee Paid	
SUBTOTAL (1)			[690]			SUBTOTAL (3)	\$40.00
SUBTOTAL (2)			[]				
SUBMITTED BY						Complete (if applicable)	
Typed or Printed Name		THOMAS W. COLE			Reg. Number	28,290	
Signature				Date	08/11/00	Deposit Account User ID	19-2380(0819-407)

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

METHOD OF EVALUATING THE POWER TRANSMISSION ABILITY OF
FRICTIONAL POWER TRANSMISSION BELT AND METHOD OF
AIDING THE DESIGNING FOR BELT DRIVE SYSTEM

5

BACKGROUND OF THE INVENTION

(a) TECHNICAL FIELD OF THE INVENTION

The present invention relates to a method of evaluating the
power transmission ability of a frictional power transmission
belt, and to a method of aiding the designing for a belt
10 drive system.

(b) PRIOR ART

When evaluating the power transmission ability of a
frictional power transmission belt, an important
characteristic of the power transmission ability evaluation
15 of the belt is a characteristic that indicates a relationship
between the shaft load (initial belt tension) for the slip
ratio of the belt and the loading torque. Concretely, when
the slip ratio is reached at its allowable limit (usually,
1%), as the shaft load is decreased and the loading torque is
20 increased, the belt power transmission ability is evaluated
highly. As a power transmission ability curve represented by
such an allowable slip ratio, there is one known in the art
in which the shaft load is plotted on the abscissa while the
ST factor by loading torque normalization is plotted on the
25 ordinate. Based on such a curve, evaluation of the power
transmission ability of the belt is conducted.

Reference is made to Figure 4 which illustrates a layout for evaluation of the belt power transmission ability. A belt c is wound around a driving pulley a and a driven pulley b. A load W is applied, at different values, to the driven pulley b for the application of belt tension by varying the center distance between the pulleys a and b. Then, for each value of the load W, the slip ratio of the belt for the input torque is found to obtain a curve shown in Figure 5. However, such a curve shows only the power transmission ability of the belt in the same layout, so that it does not have generality because the transmitted torque varies, for example, when there are variations in speed ratio and in pulley diameter.

To cope with the above, the abscissa is changed from indicating the input torque to indicating the ST factor, which provides an ST diagram as shown in Figure 6. The ST factor is the effective tension of the belt per unit contact length. As Figure 7 shows, when the belt c is wound around the pulley a(b) having a radius r (unit: m) at a contact angle θ (unit: radian) and its effective tension is represented by T_e ($= T_1$ (tight side tension) - T_2 (slack side tension)), the ST factor is given by:

$$ST = (T_q/r)/r\theta = T_q/r^2\theta = (T_1 - T_2)/r\theta,$$

where T_q is the transmitted torque (unit: N.m).

Then, referring to Figure 6, intersections of the respective loads with the ST diagram are obtained at a given

slip ratio (for example, at a slip ratio of 1% or 2%), thereby to find a relationship between the ST factor and the shaft load (unit: N) that is maintainable at any arbitrary slip ratio, which is shown in Figure 8. This is called a power transmission ability curve (i.e., a power transmission ability diagram) which shows a power transmission ability characteristic inherent to the belt by a value of the ST factor transmittable at a given slip ratio for the shaft load.

However, in the foregoing conventional method, even when the same belt is employed, there is the problem that the power transmission ability curve varies depending on the layout (the pulley diameter and the speed ratio) relative to the pulleys. For example, the same belt is run to find power transmission ability curves at three different speed ratios (i.e., in a Low condition in which the pulley diameter of the driving pulley is smaller than that of the driven pulley, in a Mid condition in which the driving and driven pulleys have the same diameter, and in a Hi condition in which the diameter of the driving pulley is greater than that of the driven pulley). The power transmission ability curves found in these conditions are different, as shown in Figures 9-11. Figures 9-11 show the Low condition, the Mid condition, and the Hi condition, respectively. In Figures 9-11, the driving pulley is referenced as D_r and the driven pulley is referenced as D_n .

Therefore, it is necessary to introduce some correction factor for the designing of a transmission condition (service condition) in a belt drive system for a belt whose power transmission ability curve varies depending on the layout relative to pulleys.

An object of the present invention is to facilitate evaluation of the belt power transmission ability and design of the transmission condition in a belt drive system by finding a belt power transmission ability curve that does not depend on the layout relative to pulleys without having to introduce any correction factor.

SUMMARY OF THE INVENTION

In order to achieve the above-described object, the present invention was made based on the following findings. That is, when finding the power transmission ability of a belt, instead of plotting the shaft load on the abscissa, the value derived from dividing the sum of a tension on the belt tight side and a tension on the belt slack side by the pulley diameter, i.e., pulley pressing force per belt unit length (hereinafter referred to as the WD factor), is plotted on the abscissa, whereby a single power transmission curve is obtained for each belt, regardless of the layout relative to the pulleys. Based on the power transmission ability curve, evaluation of the belt power transmission ability is conducted.

09:37:06.034.034.034

The present invention provides a method of evaluating the power transmission ability of a frictional power transmission belt which is wound around pulleys to transmit power, wherein for the frictional power transmission belt a relational expression between the WD factor which is pressing force to the pulleys per belt unit length (the value found by division of tension sum by pulley diameter) and the ST factor which is an effective tension of the frictional power transmission belt per unit contact length (the value found by division of belt effective tension by pulley contact length) is found. Then, from the relational expression found, evaluation of the power transmission ability of the frictional power transmission belt is conducted.

When a belt is wound around a pulley having an effective pulley diameter D (unit: m), the WD factor (unit: N/m) is given by:

$$WD = (T1 + T2)/D,$$

where T1 is the tight side tension of the belt and T2 is the slack side tension of the belt.

The foregoing WD-ST relational expression becomes a power transmission ability curve which is inherent to the belt but independent of the layout relative to the pulleys, so that the evaluation of the belt power transmission ability becomes proper and easy to conduct, therefore facilitating, based on

the power transmission ability, the designing of transmission conditions in belt drive system.

The frictional power transmission belt is formed of a flat belt, V ribbed belt, or V belt. Further, the V belt is a V belt for high power transmission which comprises an endless tension member and multiple blocks which are fixedly engaged with the endless tension member. These arrangements provide an optimal frictional power transmission belt capable of effectively exhibiting the effects of the present invention.

The present invention provides a method of aiding the designing for a belt drive system with pulleys and a frictional power transmission belt which is wound around the pulleys to transmit power. This method comprises the steps of:

for the frictional power transmission belt, finding a relational expression between WD and ST where WD is the factor which is a pressing force against the pulleys per belt unit length and ST is the factor which is an effective tension of the frictional power transmission belt per unit contact length;

from the relational expression found, evaluating the power transmission ability of the frictional power transmission belt; and

based on the belt power transmission ability evaluated, predicting a transmission condition for the belt drive system,

using the power transmission ability of the frictional power transmission belt. As a result of such arrangement, like the foregoing invention, it is possible to obtain a relational expression between the WD factor and the ST factor which is inherent to the belt but independent of the layout relative to the pulleys, therefore facilitating the designing of transmission conditions in belt drive system on the basis of the belt power transmission ability.

As the transmission condition, a pulley-belt layout is predicted. Further, the frictional power transmission belt is a variable speed V belt and a range of variable speed for the variable speed V belt is predicted as the transmission condition. In accordance with these inventions, transmission conditions as the effects of the foregoing invention can be exhibited effectively.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a characteristic diagram showing relationships between the WD factor and the ST factor for a slip ratio of 1% and for a slip ratio of 2% with respect to a belt for high power transmission.

Figure 2 is an enlarged perspective view of a belt for high power transmission relating to an embodiment of the present invention.

Figure 3 is a schematic showing in cross section an infinite variable speed drive apparatus relating to the embodiment of the present invention.

Figure 4 is an explanatory diagram showing a layout in which a belt is wound around pulleys for evaluating the power transmission ability of the belt.

Figure 5 is a graph showing the characteristic of the belt slip ratio versus the input torque.

Figure 6 is a graph showing the characteristic of the belt slip ratio versus the ST factor.

Figure 7 is a diagram showing elements by which the ST factor is found.

Figure 8 is a graph showing the characteristic of the ST factor versus the shaft load in a prior art example.

Figure 9 is a graph showing the characteristic of the ST factor versus the shaft load when the layout is in a Low condition.

Figure 10 is a graph similar to Figure 9 but shows the characteristic when the layout is in a Mid condition.

Figure 11 is a graph similar to Figure 9 but shows the characteristic when the layout is in a Hi condition.

PREFERABLE EMBODIMENT

Referring to the drawings, an example of embodiment of the present invention as a preferable concrete example thereof will be described below. First, a frictional power

Each block 7 has, at its lateral portions with respect to the direction of the belt width, a notched groove-like fitting portion 8 so that each tension member 1 can be fitted detachably from the width direction. A contact portion 11 is formed on lateral sides of each block 7 not occupied by the fitting portion 8, being in abutment against the pulley groove face (not shown). The tension members 1 are fit in the fitting portions 8 of the blocks 7, so that the blocks 7 are continuously fixed to the tension members 1 in the direction of the belt length.

An upper projected portion 9, which is a projected ridge which engages with its corresponding upper recessed portion 2 on the top surface of the tension member 1, is formed on an upper wall face of the fitting portion 8 in each block 7. On the other hand, a lower projected portion 10, which is a projected ridge which engages with its corresponding lower recessed portion 3 on the bottom surface of the tension member 1, is formed on a lower wall face of the fitting portion 8. The upper and lower projected portions 9 and 10 run parallel with each other. When the upper and lower projected portions 9 and 10 of each block 7 engage with the upper and lower recessed portions 2 and 3 of the tension member 1 respectively, the blocks 7 are fixedly engaged with the tension members 1 in the direction of the belt length. In such a state of engagement, the contact portions 11 which are

the lateral sides of each block 7 are brought into contact with the pulley groove face.

Each of the blocks 7 is formed of a hard resin material. A reinforcing member having an approximately H-shape and formed of, for example, a light-weight aluminum alloy is so embedded in the inside of the block 7 as to lie at approximately the center thereof, which is not shown in the figure. At the upper and lower projected portions 9 and 10 (i.e., where the block 7 engages the tension member 1) and at the contact portions 11 of the lateral sides (i.e., where the block 7 is brought into sliding contact with the pulley groove face), the reinforcing member is embedded in the hard resin so that it is not exposed at the block's 7 surface (since these portions are formed of hard resin). However, the reinforcing member may be arranged to expose at other surface portions of the block 7.

The belt drive system constitutes an infinite variable speed drive apparatus. As Figure 3 schematically shows, the infinite variable speed drive system comprises a driving and driven shafts 14 and 16 running parallel with each other, wherein a driving pulley 15 is mounted on the driving shaft 14 and a driven pulley 17 is mounted on the driven shaft 16. The pulley 15 is formed by a variable speed pulley having a fixed sheave 15a which is so secured to the driving shaft 14 as to rotate therewith and a movable sheave 15b which moves

0937064-084100
007F80"4902E360

toward or away from the fixed sheave 15a. Likewise, the pulley 17 is formed by a variable speed pulley having a fixed sheave 17a which is so secured to the driven shaft 16 as to rotate therewith and a movable sheave 17b which moves toward or away from the fixed sheave 17a. The high power transmission belt B is wound around the driving and driven pulleys 15 and 17. Then, the variable sheave 15b (17b) of the pulley 15 (17) is moved toward or away from the fixed sheave 15a (17a) so that power is transmitted between the driving shaft 14 and the driven shaft 16 while infinitely varying the speed ratio between the pulleys 15 and 17 (i.e., between the driving and driven shafts 14 and 16).

When evaluating the power transmission ability of the high power transmission belt B and predicting, from the belt power transmission ability, the variable speed range of the belt B in the belt drive system (which is an infinite variable speed drive apparatus), a relational expression between the WD factor and the ST factor for the high power transmission belt B is first obtained in the embodiment of the present invention, wherein WD is the pressing force that is applied to a pulley per belt unit length, whereas ST is the effective tension of the belt B per unit belt contact length to a pulley (the pulleys 15 and 17).

The ST factor (unit: N/m) is a value that is found by dividing the effective tension of the belt B by the length of

contact of the belt to a pulley (the pulleys 15 and 17). As described hereinbefore, the belt B is wound around the pulleys 15 and 17 having an effective pulley radius r (unit: m) at a contact angle θ (unit: radian). The ST factor is given by:

$$ST = (Tq/r)/r\theta = Tq/r^2\theta = (T1 - T2)/r\theta$$

where $T1$ is the tight side tension of the belt B, $T2$ is the slack side tension of the belt B, $Te (= T1 - T2)$ is the effective tension of the belt B, and Tq (unit: N·m) is the transmitted torque (see Figures 4 to 8).

On the other hand, the WD factor is a value (unit: N/m) that is found by dividing the sum of tensions ($T1 + T2$) (unit: N) by the effective diameter D (unit: m) of the pulleys 15 and 17. The WD factor is given by:

$$WD = (T1 + T2)/D$$

If the foregoing relational expression is graphically represented so that the abscissa indicates the WD factor and the ordinate indicates the ST factor, this results in different transmission curves for each slip ratio, as shown in Figure 1. The belt B is evaluated in power transmission ability by the foregoing relational expression.

Next, based on the power transmission ability of the belt B thus found, the variable speed range of the high power transmission belt B is predicted as a transmission condition (service condition) for the foregoing belt drive system.

Therefore, in the present embodiment, the relational expression of the WD factor and the ST factor for the high power transmission belt B (i.e., the power transmission ability curve) is inherent to the belt B, in other words, the WD-ST relational expression does not depend upon the layout relative to the pulleys 15 and 17. The power transmission ability of the belt B is evaluated from the relational expression, which makes it possible to properly evaluate the power transmission ability of the belt B without having to require any correction factor. In addition, the belt power transmission ability can be readily evaluated. Furthermore, prediction of the variable speed range in the belt drive system can be easily carried out based on the power transmission ability of the belt B.

In the foregoing embodiment, the frictional power transmission belt is in the form of the high power transmission belt B (block belt) which is a variable speed V belt and the belt drive system is in the form of an infinite variable speed drive apparatus. However, the present invention is applicable to other types of frictional power transmission belts and to belt drive system employing any one of such frictional power transmission belts. In addition to commonly-used V belts, flat belts and V ribbed belts may be used as a frictional power transmission belt as long as they are a friction transmission type. Further, as a belt drive

system, there are a V belt drive system, flat belt drive system, and V ribbed belt drive system.

Additionally, in the foregoing embodiment, the variable speed range of the belt drive system (infinite variable speed drive system) is predicted from the power transmission ability of the high power transmission belt B. However, a belt-pulleys layout can be predicted as a transmission condition. In such a case, the method of the present invention is also applicable to a belt drive system of multiple shaft transmission in which the belt is wound around three or more pulleys.

Next, there will be explained concrete examples in which the present invention is put into practice. Specifically, four different test conditions (layouts) were set in which different pulley diameters and different center distances were employed for the driving and driven pulleys of the belt drive system. The high power transmission belts of the same type were wound around the driving and driven pulleys to run. The four different test conditions are shown in the following

TABLE.

TABLE

TEST CONDITION	1	2	3	4
DRIVING PULLEY DIA. (mm)	60	90	54.56	137.3
DRIVEN PULLEY DIA. (mm)	60	90	136.40	68.6
SPEED RATIO	1.0	1.0	0.4	2.0
CENTER DIS. (mm)	250.80	203.60	190.61	180.00
BELT PITCH CIRCUMFERENCE LENGTH (mm)	690	←	←	←
ROTATION SPEED OF DRIVING PULLEY (rpm)	2600	←	←	←
DRIVEN SHAFT TORQUE (Nm)	5-90	5-130	5-190	5-140
SHAFT LOAD (kN)	1.0 2.0 3.0 4.0	←	←	←
AMBIENT TEMP.	ORDINARY TEMP.	←	←	←

A conventional method was used to depict power transmission ability curves for condition 1 (Mid condition), condition 3 (Low condition), and condition 4 (Hi condition), respectively. Figures 9-11 show these curves. Figures 9-11 represent the
5 condition 3 (Low condition), the condition 1 (Mid condition), and the condition 4 (Hi condition), respectively. In Figures 9 to 11, Dr and Dn designate the driving pulley and the driven pulley, respectively.

As seen from Figures 9 to 11, the power transmission
10 ability curve varies depending on the layout of the belt relative to the pulleys. The Mid condition exhibits the highest power transmission ability. The Hi condition exhibits the second highest power transmission ability. The Low condition exhibits the lowest power transmission ability. The
15 conceivable reason for this is that since these power transmission ability curves are associated with slippage (friction) occurring between the belt and each pulley, the pressing force and tractive power working on both of them are predominant factors so that the shaft load plotted on the
20 abscissa is a characteristic alternative to the pressing force and the ST factor plotted on the ordinate is a characteristic alternative to the tractive power. Additionally, since the ST factor plotted on the ordinate is obtained by dividing the effective tension of the belt by the
25 contact length, the ST factor is an index that can be

universally evaluated even if the layout is changed. On the other hand, the shaft load is not a universal index because the pressing force varies with the layout. For this reason, it is conceivable that the power transmission ability curve of the belt varies depending on the layout.

Using the method of the present invention, data at a slip ratio of 1% and data at a slip ratio of 2% were found at three different levels of the shaft load for each of the four test conditions. When these data thus found were expressed by a coordinate system in which the WD factor is plotted on the abscissa with the ST factor on the ordinate, the result shown in Figure 1 was obtained and the regression curve of these data was obtained as a power transmission ability curve. It should be noted that when the driving and driven pulleys differ in pulley diameter from each other, only the ST factor calculated based on the pulley having a smaller diameter is used in the conventional methods, but the method of the present invention is designed to calculate the WD and ST factors of the driving and driven pulleys, wherein the average of the WD factors calculated and the average of the ST factors calculated are used as their representative values. It is obvious from Figure 1 that the data can be represented by a single regression curve (power transmission ability curve) irrespective of the layout of the belt relative to the pulleys.

In the method of the present invention, a power transmission ability curve for a belt which does not depend upon the layout of a belt relative to pulleys can be attained by obtaining a relational expression of the WD factor and ST
5 factor of the belt. It has been accordingly proved that if evaluation of the belt power transmission ability is conducted using the attained power transmission ability curve, this facilitates evaluation of the belt power transmission ability and further facilitates designing of the transmitting
10 condition in a belt drive system on the basis of the evaluation result.

WHAT IS CLAIMED IS:

1. A method of evaluating the power transmission ability of a frictional power transmission belt which is wound around pulleys to transmit power, said method comprising the steps

5 of:

for said frictional power transmission belt, finding a relational expression between WD and ST where WD is the factor which is pressing force to said pulleys per belt unit length and ST is the factor which is an effective tension of said frictional power transmission belt per unit contact length; and

from said relational expression found, evaluating the power transmission ability of said frictional power transmission belt.

15 2. The method of claim 1,

wherein said frictional power transmission belt is a flat belt.

3. The method of claim 1,

20 wherein said frictional power transmission belt is a V ribbed belt.

4. The method of claim 1,

wherein said frictional power transmission belt is a V belt.

5. The method of claim 4,

wherein said V belt is a V belt for high power transmission which comprises an endless tension member and multiple blocks which are fixedly engaged with said endless tension member.

6. A method of aiding the design for a belt drive system
5 with pulleys and a frictional power transmission belt which is wound around said pulleys to transmit power, said method comprising the steps of:

for said frictional power transmission belt, finding a relational expression between WD and ST where WD is the
10 factor which is pressing force to said pulleys per belt unit length and ST is the factor which is an effective tension of said frictional power transmission belt per unit contact length;

from said relational expression found, evaluating the power
15 transmission ability of said frictional power transmission belt; and

based on said belt power transmission ability evaluated, predicting a transmission condition for said belt drive system, using the power transmission ability of said
20 frictional power transmission belt.

7. The method of claim 6,
wherein a pulley-belt layout is predicted as said transmission condition.

8. The method of claim 6,

wherein said frictional power transmission belt is a variable speed V belt; and

wherein a range of variable speed for said variable speed V belt is predicted as said transmission condition.

5

ABSTRACT OF THE PUBLICATION

The power transmission ability of a belt for high power transmission is predicted. A power transmission ability curve of the belt that does not depend on the layout relative to the pulleys is found, thereby to facilitate evaluation of the belt power transmission ability and designing of the transmission condition of a belt drive system. To this end, for the high power transmission belt, a relational expression between the WD factor which is the pressing force against pulleys per belt unit length and the ST factor which is the effective tension of the belt per unit contact length to the pulleys is found. Based on the relational expression, evaluation of the power transmission ability of the belt is conducted. The WD-ST relational expression becomes a power transmission ability curve which is inherent to the belt B but independent of the layout relative to the pulleys, therefore facilitating evaluation of the belt power transmission ability and designing of the transmission condition of the belt drive system.

Fig. 1

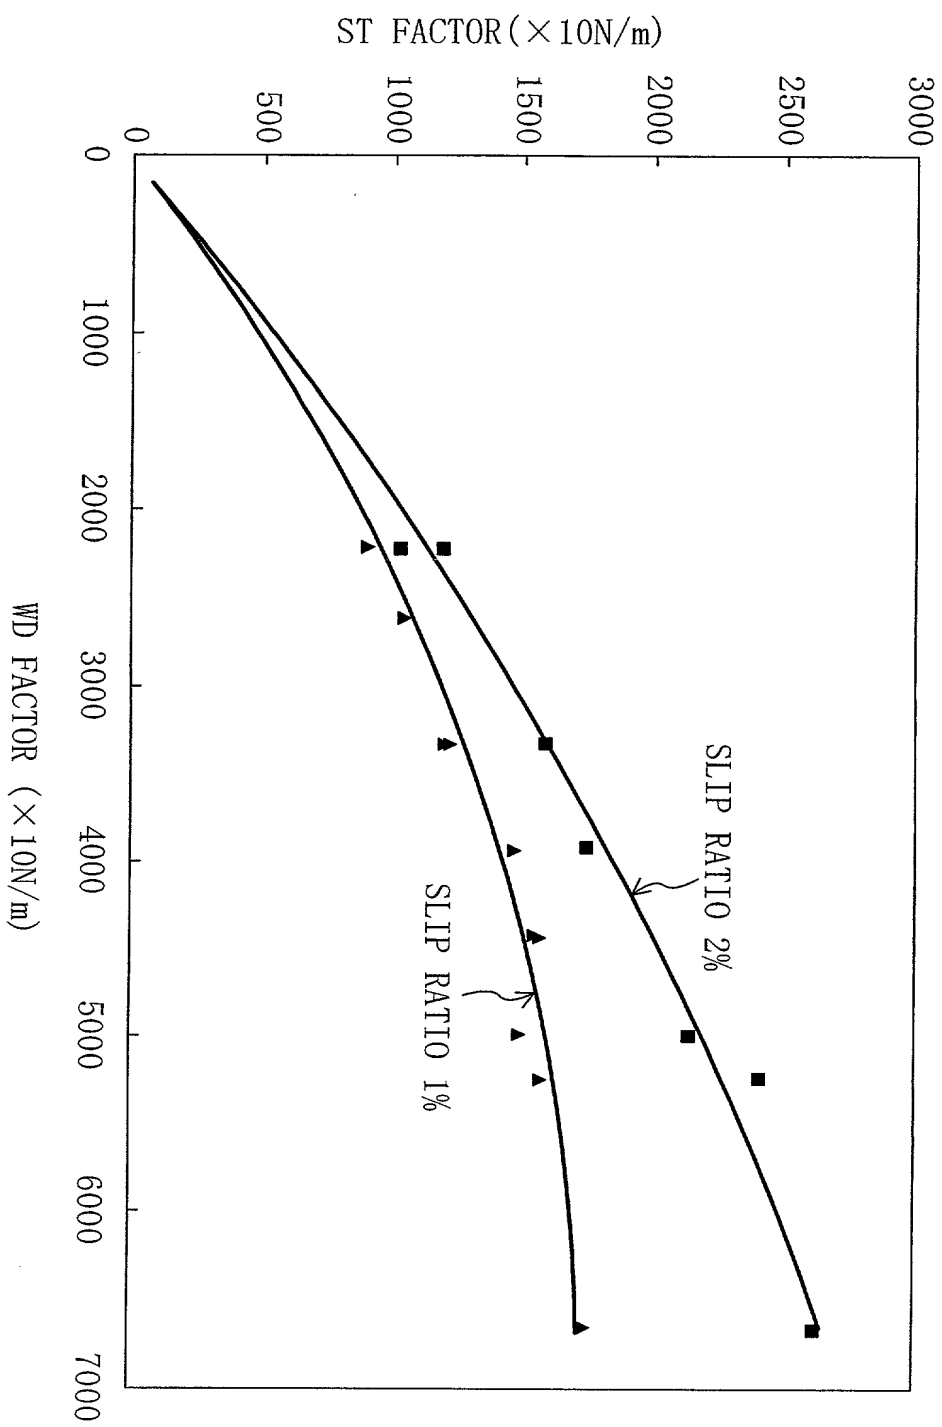


Fig. 2


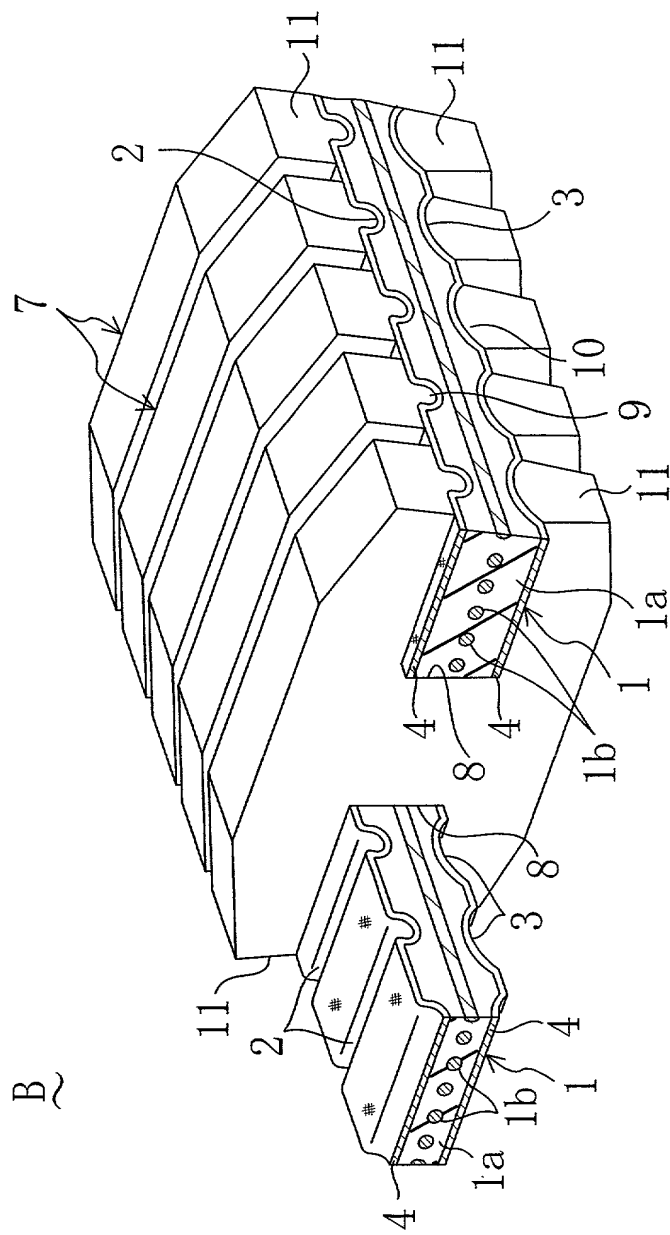


Fig. 3

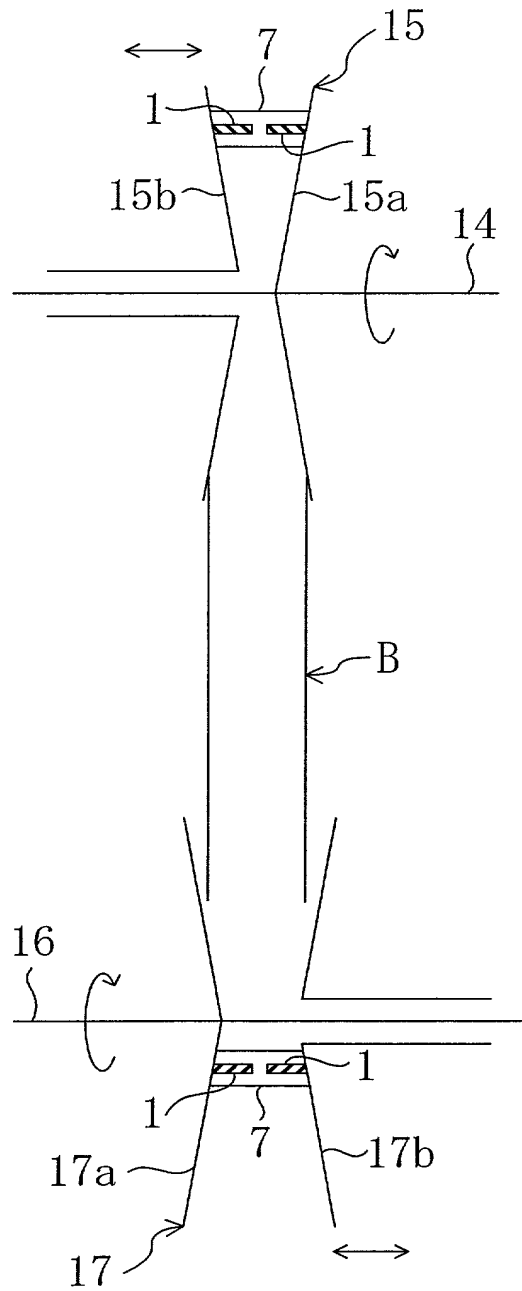

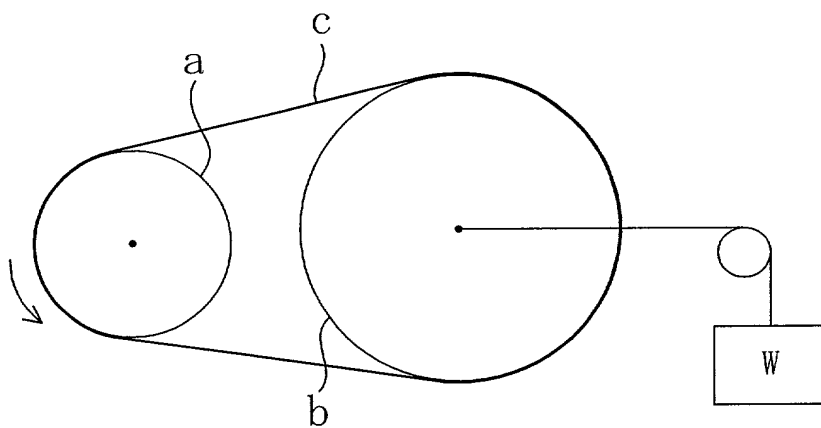
[illegible]

Fig. 5


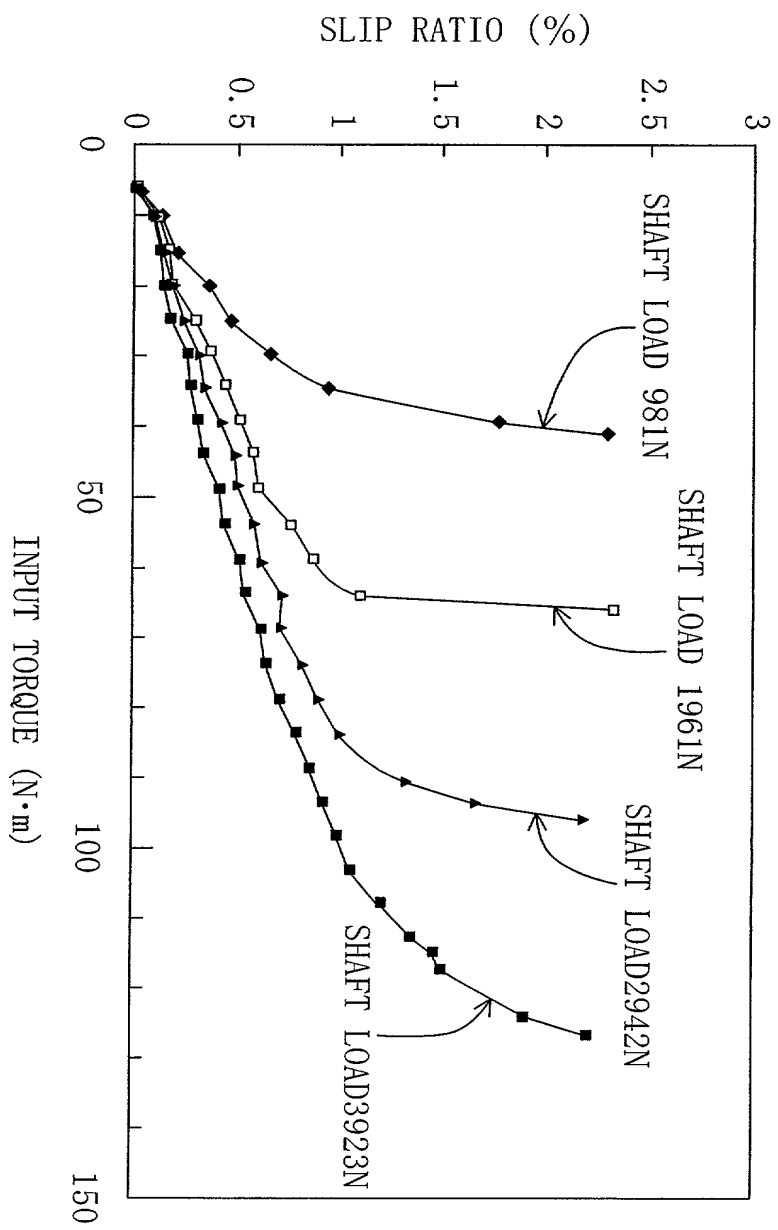


Fig. 6

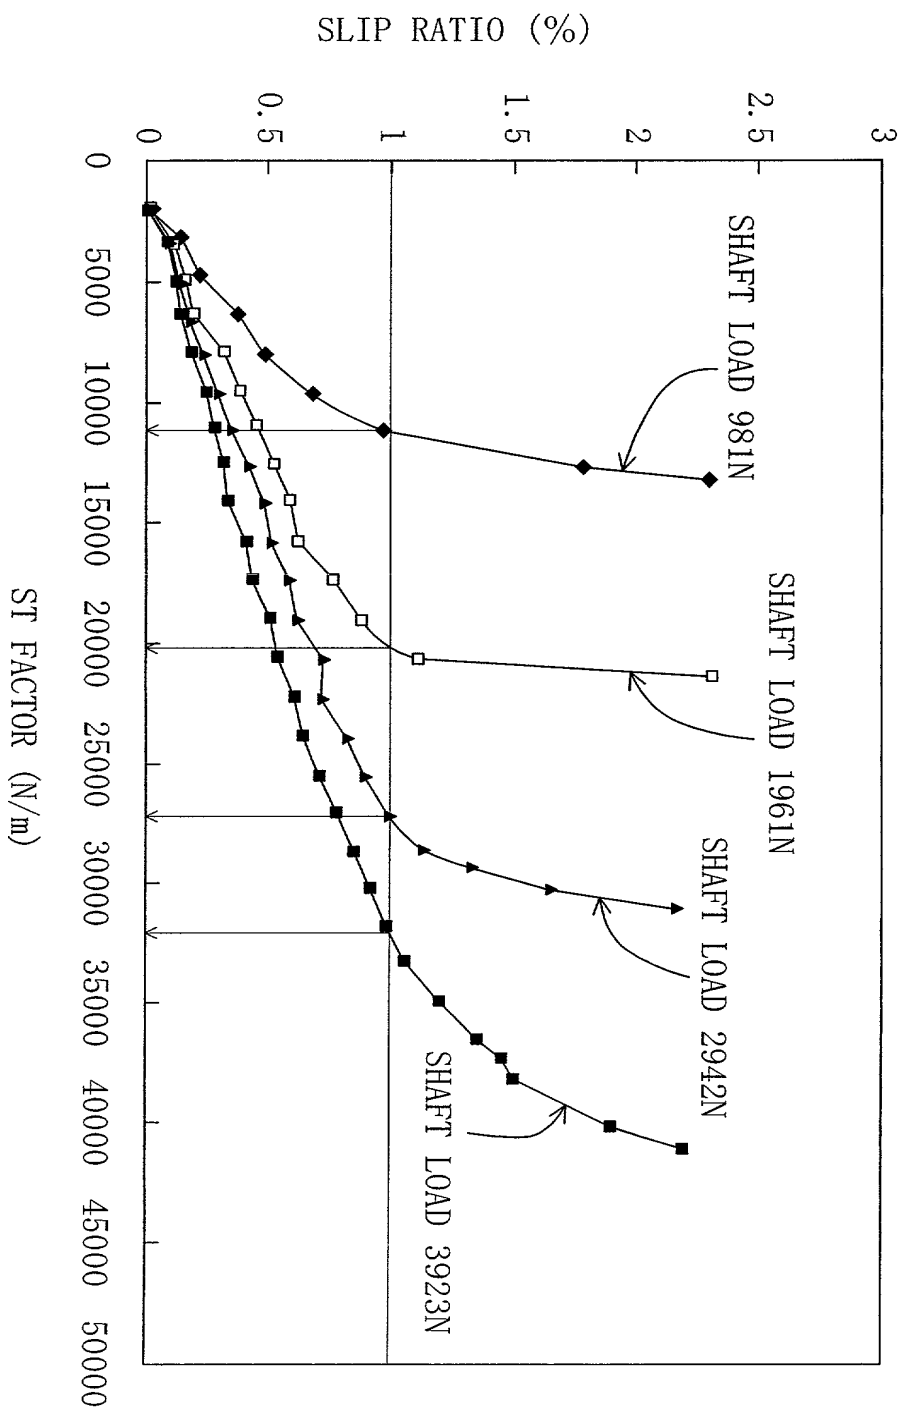

Parameter	Unit	Value
Temperature	°C	25.0
Pressure	atm	1.0
Flow rate	L/min	1.0
Concentration	g/L	0.1
pH		7.0
Time	min	10
Distance	cm	10
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1.0
Volume	L	1.0
Mass	g	0.1
Area	cm ²	1.0
Length	cm	1.0
Width	cm	1.0
Height	cm	1.0
Depth	cm	1.0
Radius	cm	1.0
Diameter	cm	1

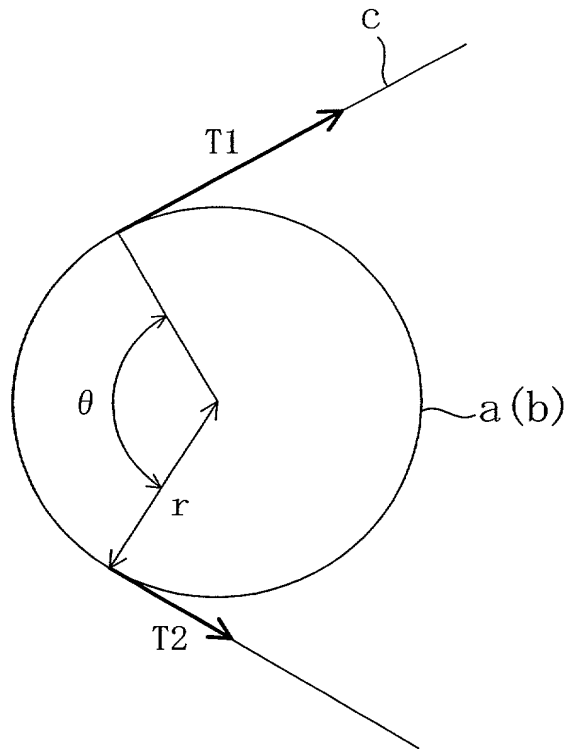


Fig. 8

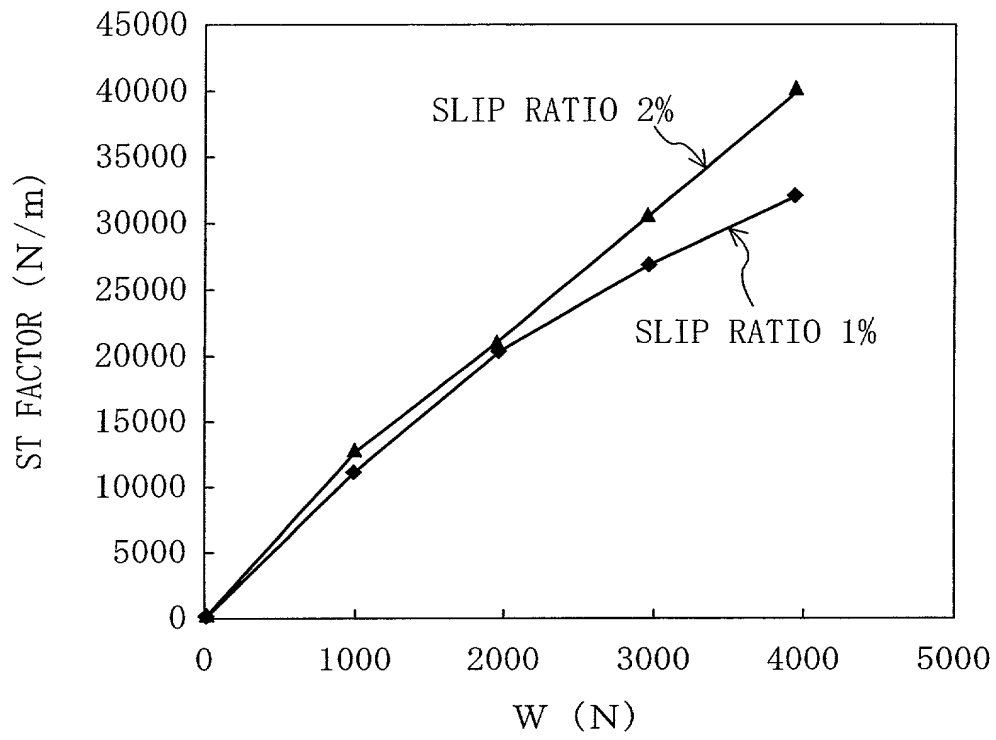


Fig. 9



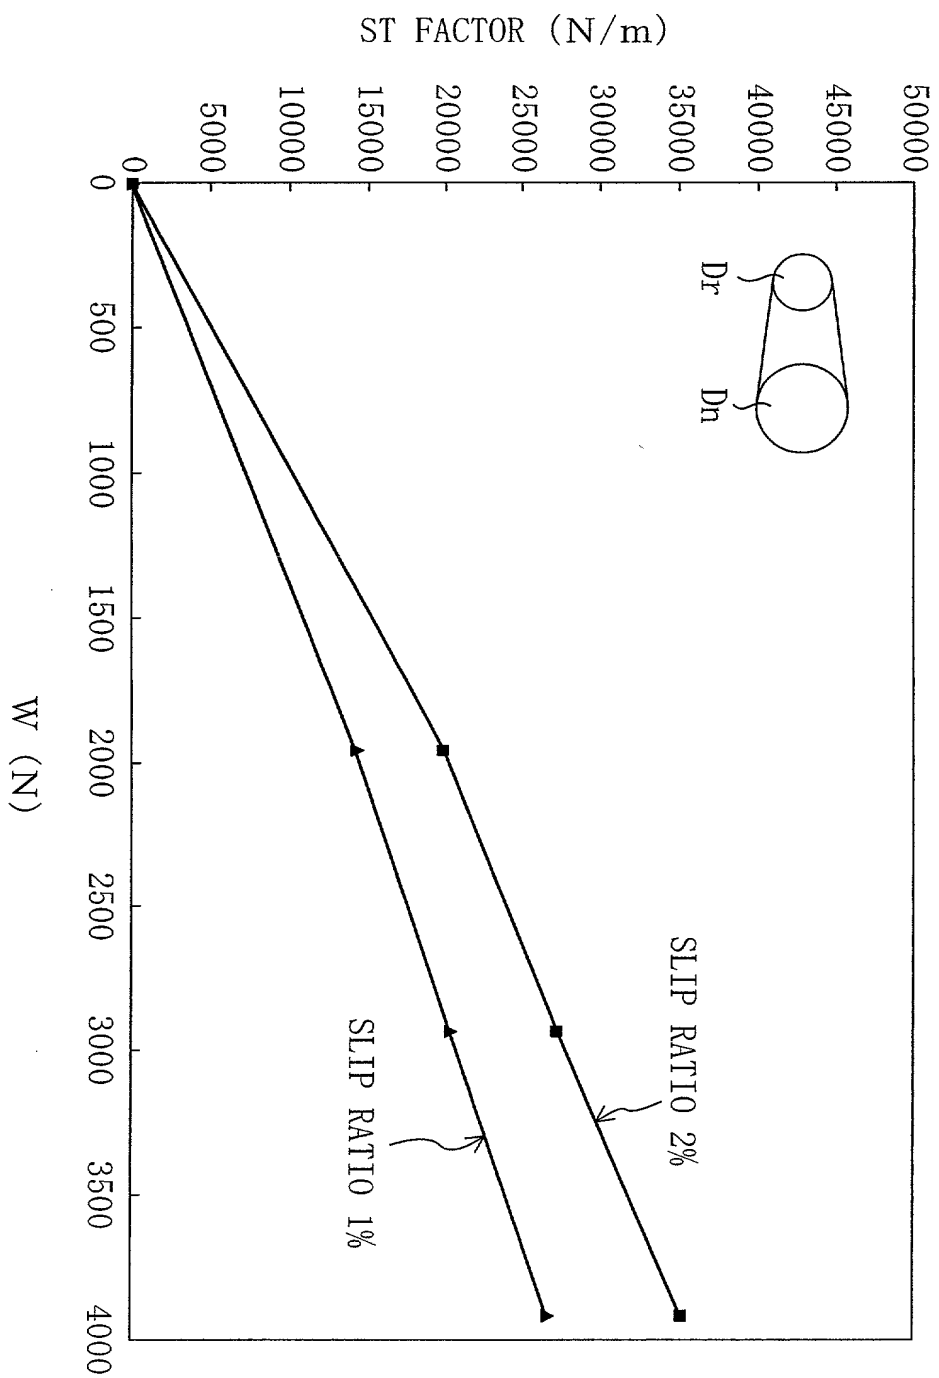


Fig. 10

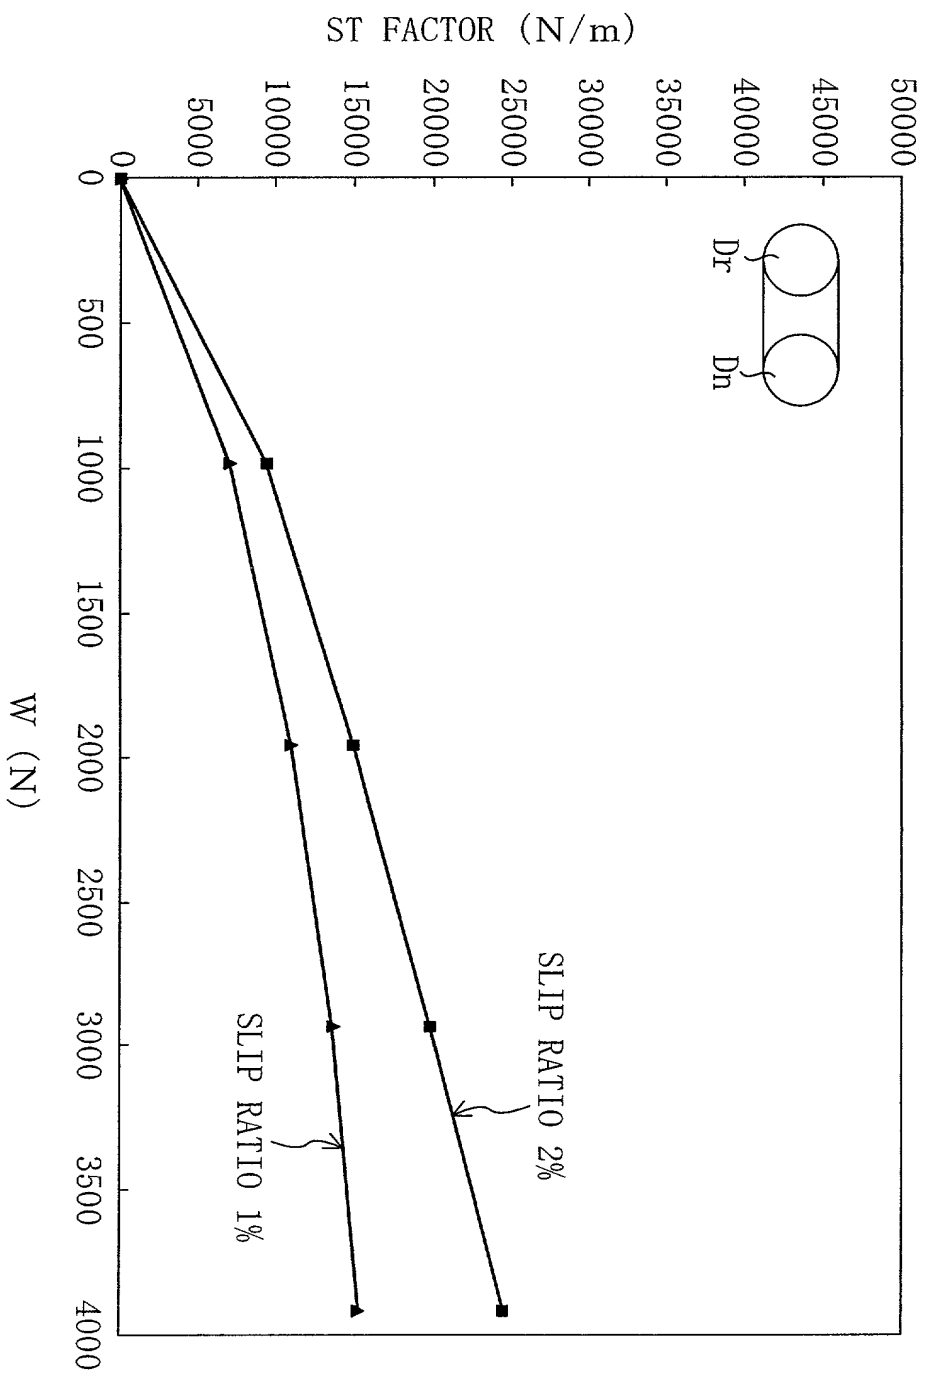



DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Attorney Docket No.

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the invention entitled: METHOD OF EVALUATING THE POWER TRANSMISSION ABILITY OF FRICTIONAL POWER TRANSMISSION BELT AND METHOD OF AIDING THE DESIGNING FOR BELT DRIVE SYSTEM, the specification of which is attached hereto unless the following box is checked:

☐ The specification was filed on
and was assigned Serial No.
(if known)
and was amended on
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof, or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows:

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and checked at right:

Prior Foreign Application(s)			Priority Claimed	
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
11-232785	JAPAN	08/19/1999	X	

All foreign applications, if any, for any Patent or Inventor's Certificate filed more than 12 months prior to the filing date of this application:

Country	Application No.	Date of Filing (Month/Day/Year)

00637064-081100

- 2 -

I hereby claim the benefit under Title 35, United States Code, § 119(e) or § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Filing Date	Status: patented, pending, abandoned

I hereby appoint the following attorneys to prosecute this application and/or any international application and to transact all business in the Patent and Trademark Office connected therewith:

Daniel W. Sixbey, (Reg. No. 20,932)
 Charles M. Leedom, Jr. (Reg. No. 26,477)
 David S. Safran (Reg. No. 27,997)
 Donald R. Studebaker (Reg. No. 32,815)
 Tim L. Brackett (Reg. No. 36,092)
 Robert M. Schulman (Reg. No. 31,196)

Stuart J. Friedman (Reg. No. 24,312)
 Gerald J. Ferguson, Jr. (Reg. No. 23,016)
 Thomas W. Cole (Reg. No. 28,290)
 Jeffrey L. Costellia (Reg. No. 35,483)
 Eric J. Robinson (Reg. No. 38,285)
 Thomas M. Blasey (Reg. No. 33,475)

Send Correspondence to: Thomas W. Cole
 Nixon Peabody LLP
 8180 Greensboro Drive, Suite 800
 McLean, Virginia 22102
 Telephone: (703) 790-9110

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

The undersigned hereby authorize any U.S. attorney or agent named herein to accept and follow instructions from Maeda Patent Office as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney or agent and the undersigned. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys or agents named herein will be so notified by the undersigned.

FULL NAME OF SOLE OR FIRST INVENTOR	INVENTOR'S SIGNATURE	DATE
Ryuichi KIDO	<i>Ryuichi Kido</i>	Aug. 8, '00
RESIDENCE (City, State & Country)	CITIZENSHIP	
Hyogo, Japan	Japanese	
POST OFFICE ADDRESS (Complete Address including City, State & Country)		
C/O BANDO CHEMICAL INDUSTRIES, LTD., 2-15, Meiwa-dori 3-chome, Hyogo-ku, Kobe-shi, Hyogo 652-0883, Japan		

FULL NAME OF SECOND JOINT INVENTOR (if any) Mitsuhiko TAKAHASHI	INVENTOR'S SIGNATURE <i>Mitsuhiko Takahashi</i>	DATE Aug. 8, '00
RESIDENCE (City, State & Country) Hyogo, Japan		CITIZENSHIP Japanese
POST OFFICE ADDRESS (Complete Address including City, State & Country) C/O BANDO CHEMICAL INDUSTRIES, LTD., 2-15, Meiwa-dori 3-chome, Hyogo-ku, Kobe-shi, Hyogo 652-0883, Japan		
FULL NAME OF THIRD JOINT INVENTOR (if any)	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Address including City, State & Country)		
FULL NAME OF FOURTH JOINT INVENTOR (if any)	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Address including City, State & Country)		
FULL NAME OF FIFTH JOINT INVENTOR (if any)	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Address including City, State & Country)		
FULL NAME OF SIXTH JOINT INVENTOR (if any)	INVENTOR'S SIGNATURE	DATE
RESIDENCE (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Address including City, State & Country)		

0037064-00100